


Metal fiber optic terminal box



BA08

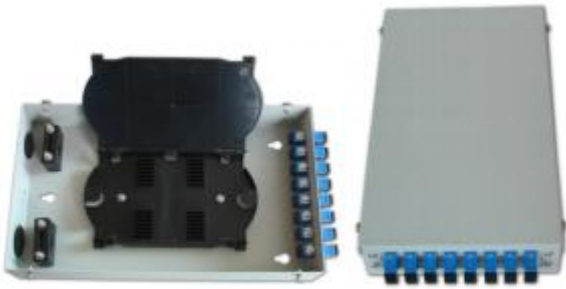

BG06



BK04



BK12/8

Model	Dimension W*H*D (mm)	Material	Adapter port	Splicing capacity	Cable port	Application
BA08	150x260x44	Cold roll steel	8 SC simplex	12 fibers	2 port	Indoor wall mounted
BG06	108.9x152x36.4	Cold roll steel	4 SC simplex	4 fibers	2 port	Indoor wall mounted; With lock.
BK04	141x105x30	Cold roll steel	4 SC simplex	6 fibers	1 port	Indoor wall mounted
BK12/8	200x168.5x34.9	Cold roll steel	8 SC simplex	12 fibers	1 port	Indoor wall mounted

Metal fiber optic terminal box



BH12



BF12M



BKL12



BSP16

Model	Dimension W*H*D (mm)	Material	Adapter port	Splicing capacity	Cable port	Application
BH12	250x300x150	Cold roll steel	12 SC simplex	12 fibers	4 ports	Outdoor wall mounted
BF12M	220x250x70.5	Cold roll steel	12 SC simplex	12 fibers	3 ports	Outdoor wall mounted
BKL12	170x233.8x40	Cold roll steel	/	12 fibers	1 round & 1 oval port	Indoor wall mounted; With drop cable fixing part.
BSP16	254x305x80	Cold roll steel	24 SC simplex	24 fibers	3 ports	Outdoor wall mounted; Can load PLC 1:16 splitter.