


End A

End B

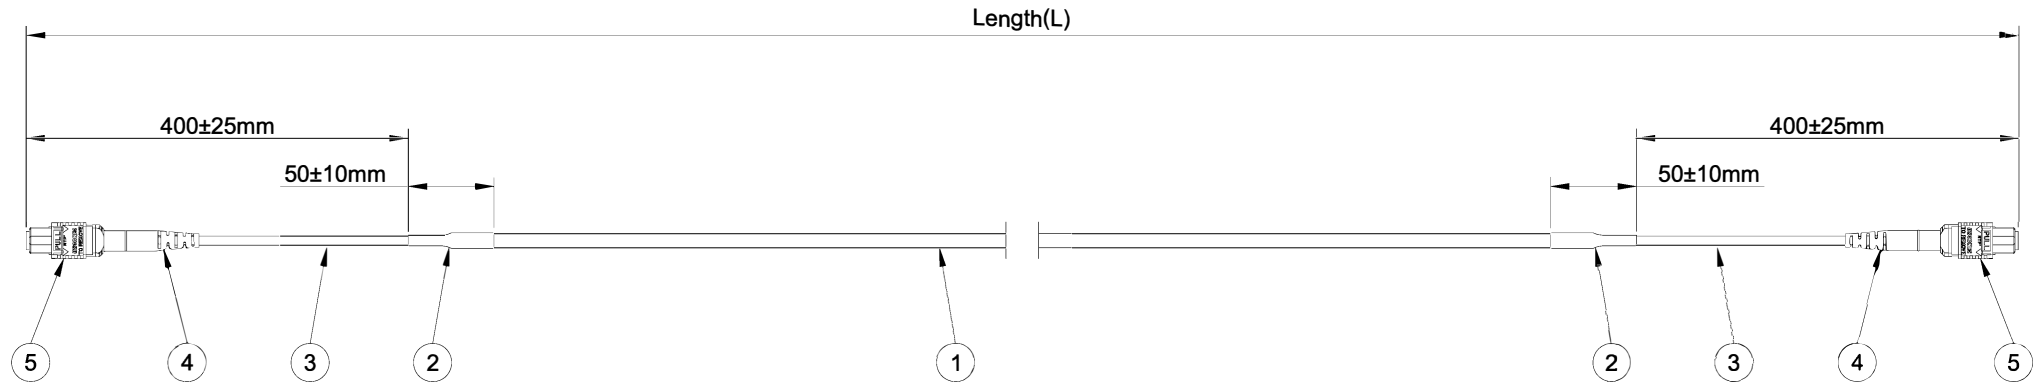

Performance:

- 1. MTP/PC: IL≤0.60dB; RL≥26dB
- 2. Polarity, see page 2


Length Tolerance:

- 0/+50mm(Length<1M).
- 0/+100mm(1M≤Length≤10M).
- 0/+1%L(Length>10M).

NO.	Specifications	Qty.
1	Ø6.4mm 12F OM2 Loose Cable / PE / Black	1
2	Heatshrink Tube / Black	2
3	Ø3.0mm Tube / LSZH / Orange	2
4	3.0mm MTP Connector Boot / Black	2
5	12F MTP/PC MM Female Connector / Beige	2
01	First Issue	
	REVISION RECORD DESP.	ECN.NO ZONE BY DATE

TOLERANCE	±MM	PART DESCRIPTION		PART NO.	
X	---	12F MTP/PC(F)-MTP/PC(F) OM2 Patchcord Polarity A		--	
X.X	---	DRAWN	CHKD	APROVED	
X.XX	---	YF.WANG	FY.LIANG	Dylan Chen	
X.XXX	---	SCALE	UNIT	QTY	PAGE
REV	---	---	mm	1 PCS	1 OF 2
P/N	---	THIRD ANGLE PROJECTION			
		FIBRE 2 EU Fibre 2 EU GmbH			

Polarity A

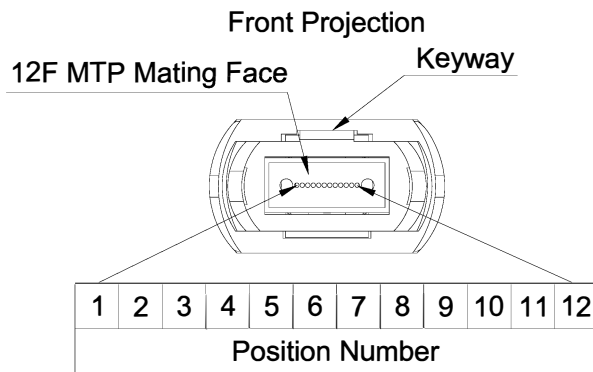

End A

MTP Polarity as viewed from ferrule end face with keyway at the up-left to right


Position	Fiber Colour
1	Blue
2	Orange
3	Green
4	Brown
5	Grey
6	White
7	Red
8	Black
9	Yellow
10	Purple
11	Pink
12	Aqua

End B

MTP Polarity as viewed from ferrule end face with keyway at the up-left to right

Position	Fiber Colour
1	Blue
2	Orange
3	Green
4	Brown
5	Grey
6	White
7	Red
8	Black
9	Yellow
10	Purple
11	Pink
12	Aqua



TOLERANCE	±MM	PART DESCRIPTION		PART NO.	
X	—	12F MTP/PC(F)-MTP/PC(F) OM2 Patchcord Polarity A		—	
X.X	—	DRAWN YF.WANG		CHKD FY.LIANG	APROVED Dylan Chen
X.XX	—	SCALE	UNIT	QTY	PAGE
X.XXX	—	—	mm	1 PCS	2 OF 2
REV	—	THIRD ANGLE PROJECTION			
P/N	—				
		FIBRE 2 EU Fibre 2 EU GmbH			

01	First Issue			YF.WANG	03-05-2020
REV	REVISION RECORD DESP.	ECN.NO	ZONE	BY	DATE