


End A

End B

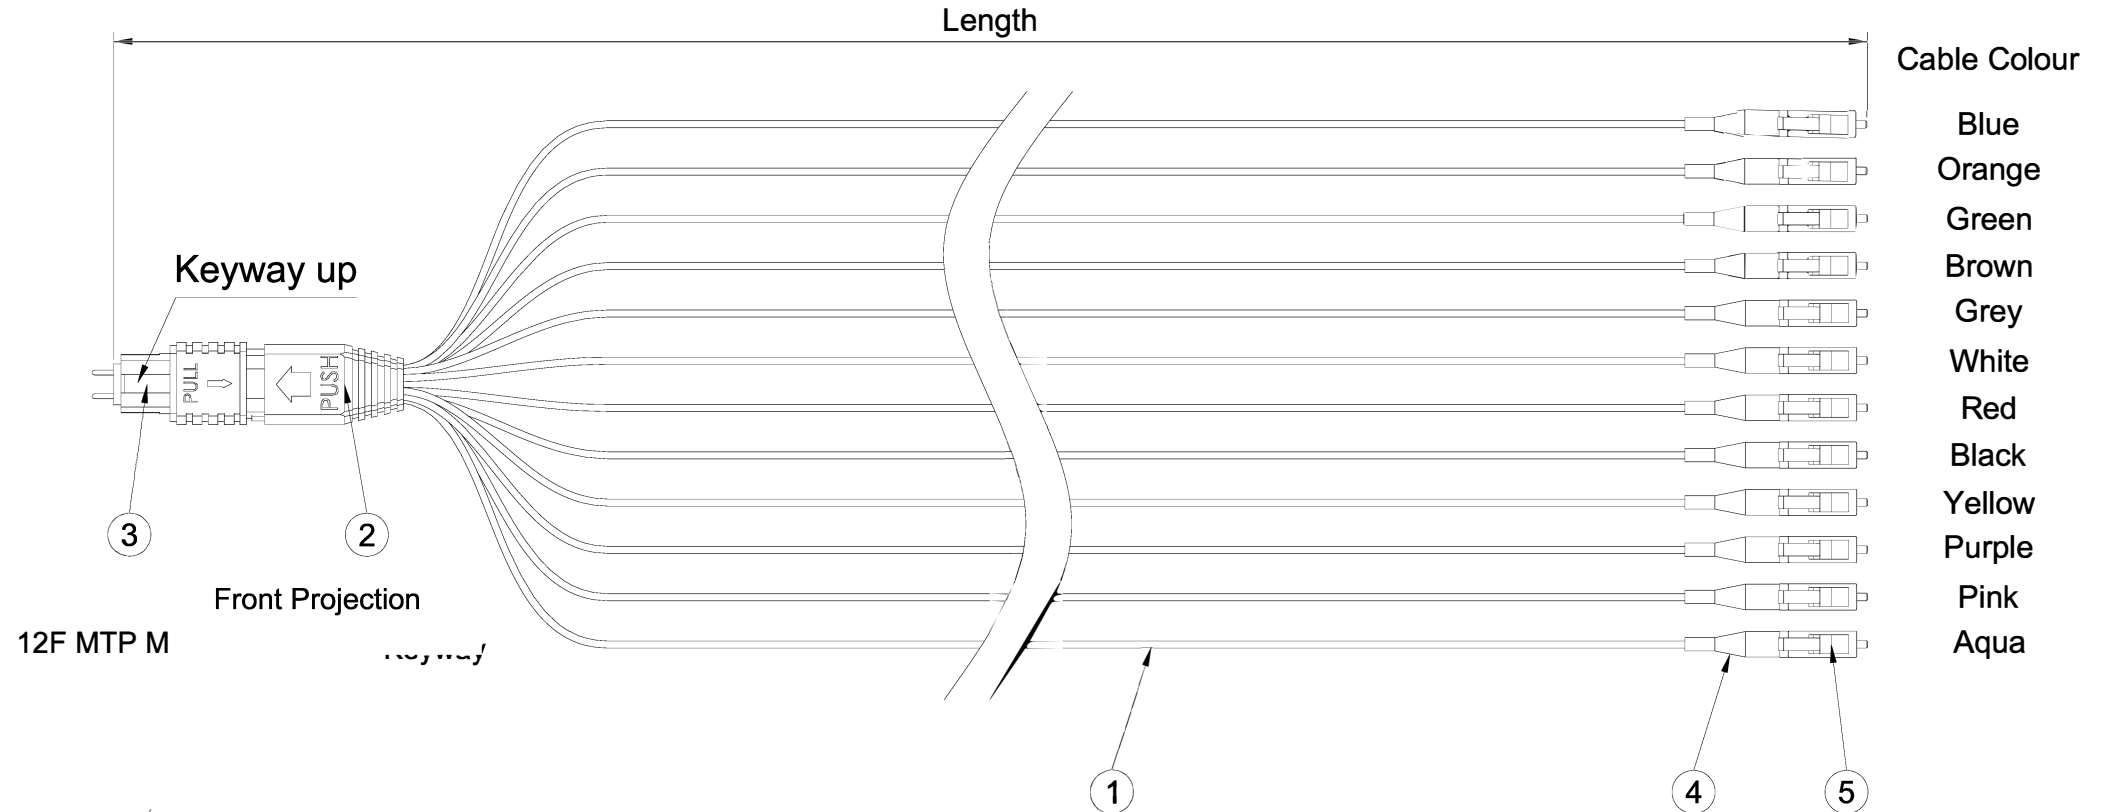

Cable Colour

- Blue
- Orange
- Green
- Brown
- Grey
- White
- Red
- Black
- Yellow
- Purple
- Pink
- Aqua


12F MTP M  
Front Projection

Position Number											
1	2	3	4	5	6	7	8	9	10	11	12
Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Purple	Pink	Aqua

Length Tolerance:  
 -0/+50mm(Length<1M).  
 -0/+100mm(1M≤Length≤10M).  
 -0/+1%L(Length>10M).

Performance:  
 1. Test wavelength: 850nm& 1300nm  
 2. MTP/PC: IL≤0.35 dB; RL≥40 dB  
 3. LC/PC: IL≤0.15 dB; RL≥40 dB

NO.	Specifications	Qty.
1	∅0.9mm OM2 Loose Buffer Cable / LSZH / 12 Colours	12
2	MTP Flat Boot / Black	1
3	12F MTP/PC MM Elite Male Connector / Aqua	1
4	LC 0.9mm Boot / White	12
5	0.9mm LC/PC MM Connectr / Beige	12
01	First Issue	JQ.ZHANG 10-28-2020
REV	REVISION RECORD DESP.	ECN.NO ZONE BY DATE

TOLERANCE	±MM	PART DESCRIPTION		PART NO.	
X	---	12F MTP/PC(M)-LC/PC OM2 Patchcord		--	
X.X	---	DRAWN	CHKD	APROVED	
X.XX	---	JQ.ZHANG	FY.LIANG	Dylan Chen	
X.XXX	---	SCALE	UNIT	QTY	PAGE
REV	---	---	mm	1 PCS	1 OF 1
P/N	---				
		<b>FIBRE 2 EU</b> Fibre 2 EU GmbH			